




Features

- Available Output Voltage:10V
- Maximum Input Voltage:
30V for $V_{OUT} < 13V$
- Maximum Output Current:
Exceed 100mA at $T_J = 25^{\circ}C$
- Output Tolerances:
 $\pm 3\%$ at $T_J = 25^{\circ}C$
 $\pm 5\%$ over the Operating T_J
- No External Components

Applications

- TV Board
- Air Conditioner
- Vehicle Mounted Radar
- Charging Device




- 1: OUT
- 2: GND
- 3: IN

Package Marking and Ordering Information


Product ID	Pack	Marking	Qty(PCS)
L78L10ACUTR	SOT-89	78L10	1000

SOT-89

Typical Application Circuit

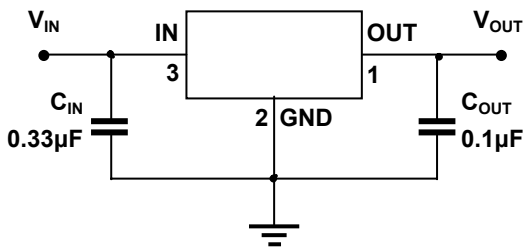

Conventional Circuit

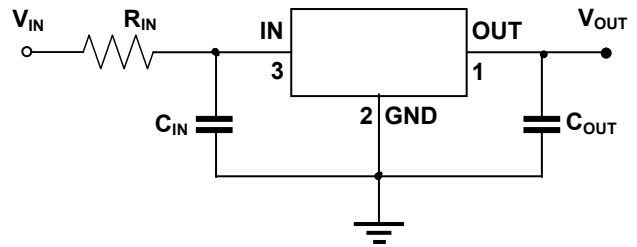

Resistance are used at IN

Absolute Maximum Ratings

Characteristic	Symbol	Value	Units
Maximum input voltage	V_{IN}	30	V
Maximum junction temperature	$T_{J\ Max}$	150	$^{\circ}C$
Storage temperature	T_{stg}	- 65 ~ 150	$^{\circ}C$
Soldering temperature & time	T_{solder}	260 $^{\circ}C$, 10s	-



Electrical Characteristics

L78L10ACUTR ($V_{OUT} = 5.0V$, $V_{IN} = 13V$, $I_{OUT} = 40mA$, $C_{IN} = 0.33\mu F$, $C_{OUT} = 0.1\mu F$, $T_J = 25^\circ C$, unless otherwise specified)


Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output voltage	V_o		$25^\circ C$	9.6	10.0	10.4	V
		$13V \leq V_i \leq 25V, I_o = 1mA \sim 40mA$	$0 \sim 125^\circ C$	9.5	10.0	10.5	V
		$I_o = 1mA \sim 70mA$		9.5	10.0	10.5	V
Load Regulation	ΔV_o	$I_o = 1mA \sim 100mA$	$25^\circ C$		20	90	mV
		$I_o = 1mA \sim 40mA$	$25^\circ C$		11	40	mV
Line regulation	ΔV_o	$13V \leq V_i \leq 25V$	$25^\circ C$		51	175	mV
		$14V \leq V_i \leq 25V$	$25^\circ C$		42	125	mV
Quiescent Current	I_q		$25^\circ C$		4.2	6	mA
Quiescent Current Change	ΔI_q	$14V \leq V_i \leq 25V$	$0 \sim 125^\circ C$			1.5	mA
	ΔI_q	$1mA \leq I_o \leq 40mA$	$0 \sim 125^\circ C$			0.1	mA
Output NoiseVoltage	V_N	$10Hz \leq f \leq 100KHz$	$25^\circ C$		62		μV
RippleRejection	RR	$15V \leq V_i \leq 25V, f = 120Hz$	$0 \sim 125^\circ C$	3744			dB
DropoutVoltage	V_d		$25^\circ C$		1.7		V

* Pulse test.




Typical Characteristics


Output Characteristics

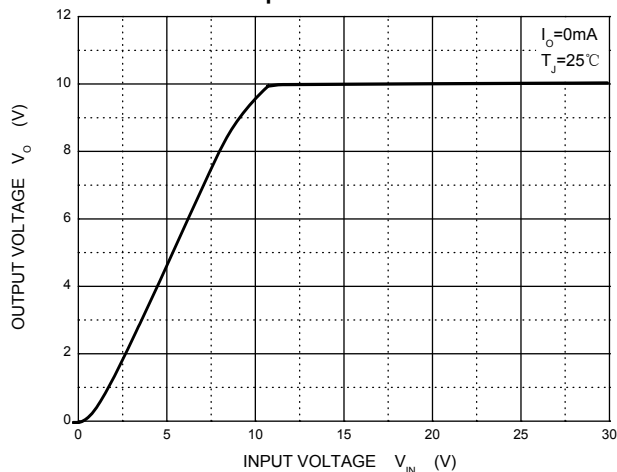


Dropout Characteristics

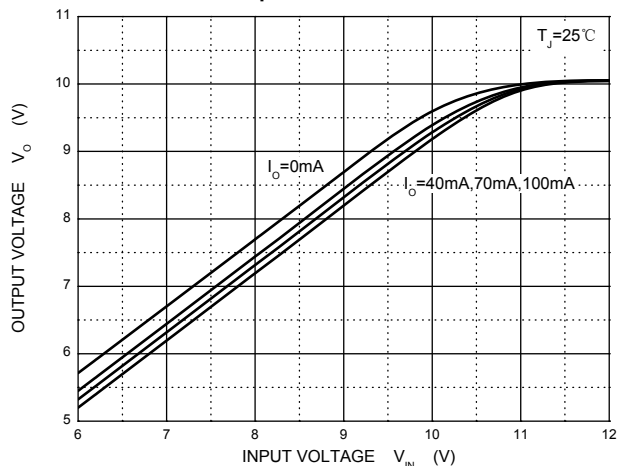


Quiescent Current vs Input Voltage

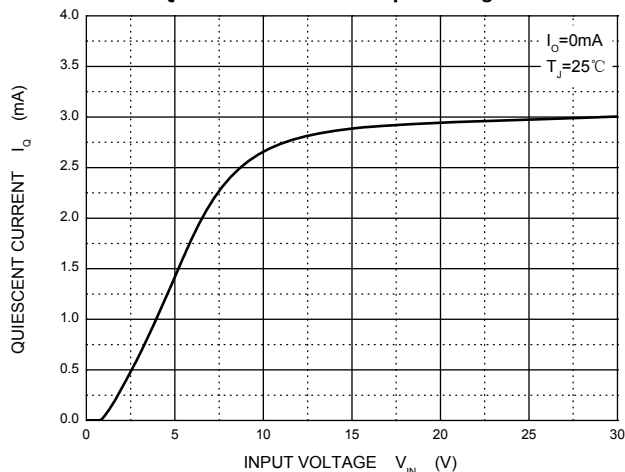


Current Cut-off Grid Voltage

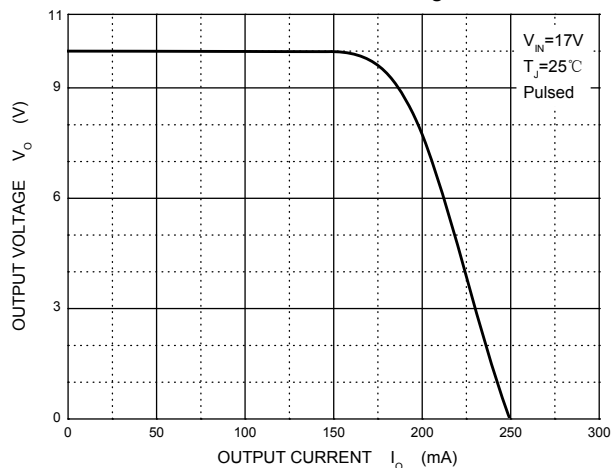

Output Voltage vs Junction Temperature

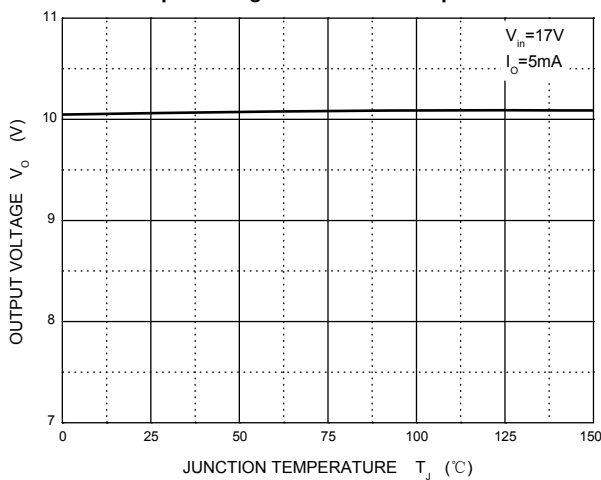


Power Derating Curve

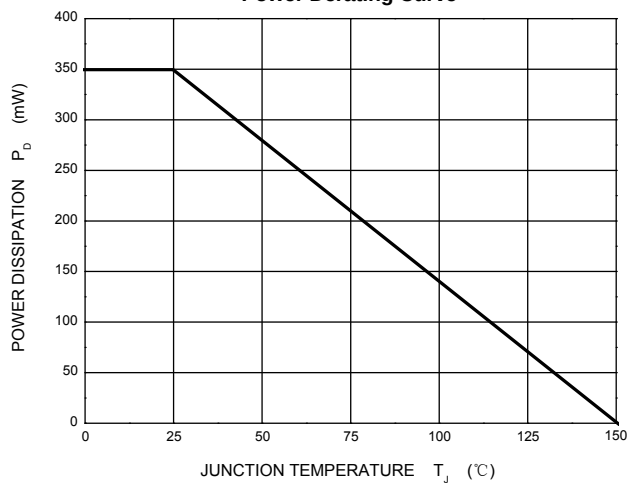



SOT-89 Package Outline Dimensions

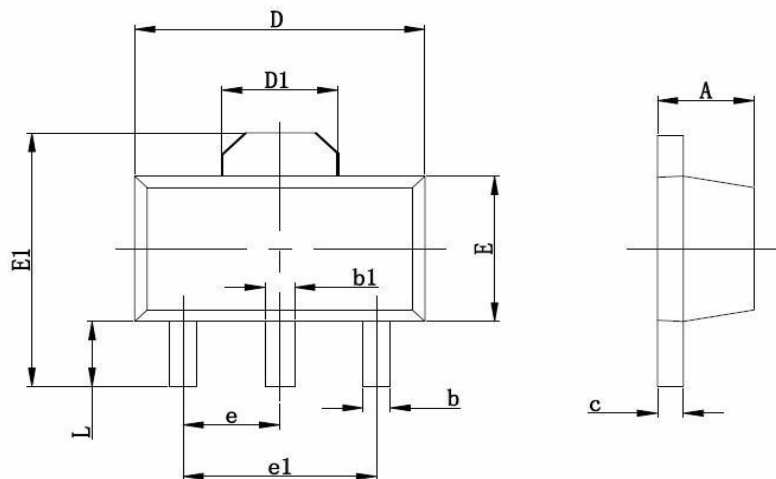

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.