




Description

The BUK9510-100B,127 use advanced SGT MOSFET technology to provide low $R_{DS(ON)}$, low gate charge, fast switching and excellent avalanche characteristics.

This device is specially designed to get better ruggedness and suitable.




TO-220C

General Features

$V_{DS} = 100V$ $I_D = 70A$

$R_{DS(ON)} < 10.5m\Omega$ @ $V_{GS}=10V$



N-Channel MOSFET

Application

Battery protection

Load switch

Uninterruptible power supply

Ordering Information

Product ID	Pack	Brand	Qty(PCS)
BUK9510-100B,127	TO-220C	HXY MOSFET	50

Absolute Maximum Ratings ($T_C=25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Continuous Drain Current $T_C=25^{\circ}C$	70	A
I_{DM}	Puled Drain Current	280	A
EAS	Single Pulse Avalanche Energy	110	mJ
$P_D@T_C=25^{\circ}C$	Total Power Dissipation	100	W
T_{STG}	Storage Temperature Range	-55 to 150	$^{\circ}C$
T_J	Operating Junction Temperature Range	-55 to 150	$^{\circ}C$
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	64	$^{\circ}C/W$
$R_{\theta JC}$	Thermal Resistance Junction-Case	1.25	$^{\circ}C/W$



Electrical Characteristics($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Value			Units
			Min.	Typ.	Max.	
Static Characteristics						
V _{DSS}	Drain to Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	--	--	V
I _{DSS}	Drain to Source Leakage Current	V _{DS} =100V, V _{GS} =0V	--	--	1	μA
I _{GSS(F)}	Gate to Source Forward Leakage	V _{GS} =+20V, V _{DS} =0V	--	--	100	nA
I _{GSS(R)}	Gate to Source Reverse Leakage	V _{GS} =-20V, V _{DS} =0V	--	--	-100	nA
V _{GS(TH)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.3	1.8	2.3	V
R _{DS(ON)}	Drain-to-Source On-Resistance	V _{GS} =10V, I _D =20A	--	8.5	10.5	mΩ
		V _{GS} =4.5V, I _D =15A		9.5	15	mΩ
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{GS} = 0V V _{DS} = 50V f = 1.0MHz	--	1368	--	pF
C _{oss}	Output Capacitance		--	451	--	
C _{rss}	Reverse Transfer Capacitance		--	12.9	--	
R _g	Gate resistance	V _{GS} =0V,V _{DS} Open	--	0.48	--	Ω
Resistive Switching Characteristics						
t _{d(ON)}	Turn-on Delay Time	I _D =10A V _{DS} = 50V V _{GS} = 10V R _G = 4Ω	--	16	--	ns
t _r	Rise Time		--	10	--	
t _{d(OFF)}	Turn-Off Delay Time		--	40	--	
t _f	Fall Time		--	6	--	
Q _g	Total Gate Charge	V _{GS} = 10V V _{DS} = 50V I _D =10A	--	31.3	--	nC
Q _{gs}	Gate Source Charge		--	3.49	--	
Q _{gd}	Gate Drain Charge		--	7.63	--	
Source-Drain Diode Characteristics						
I _S	Diode Forward Current	T _C =25 °C	--	--	70	A
V _{SD}	Diode Forward Voltage	I _S =10A, V _{GS} =0V	--	--	1.2	V
t _{rr}	Reverse Recovery time	I _S =10A, V _{DD} =50V	--	103	--	ns
Q _{rr}	Reverse Recovery Charge	dI/dt=100A/μs	--	187	--	nC


a1: Repetitive rating; pulse width limited by maximum junction temperature

a2: $V_{DD}=50V, L=0.3mH, R_g=25\Omega$, Starting $T_J=25^{\circ}\text{C}$




Typical Characteristics($T_C=25^{\circ}\text{C}$ unless otherwise noted)


Typ. output characteristics
 $I_D=f(V_{DS})$

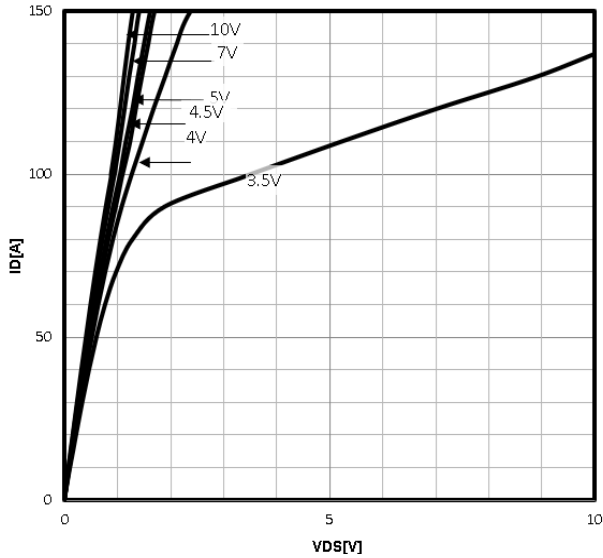


Typ. drain-source on resistance
 $R_{DS(on)}=f(I_D)$

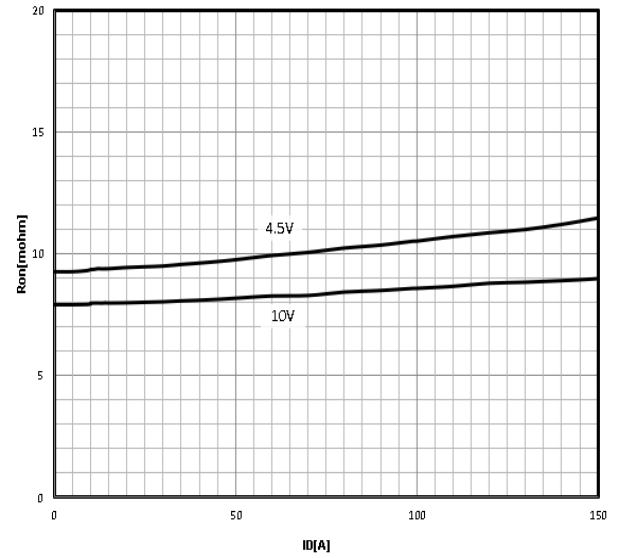

Typ. transfer characteristics
 $I_D=f(V_{GS})$

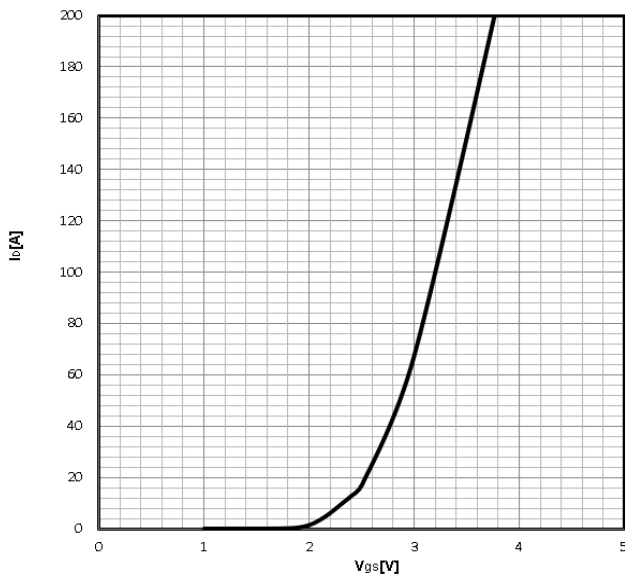


Drain-source on-state resistance
 $R_{DS(on)}=f(T_j); I_D=20\text{A}; V_{GS}=10\text{V}$

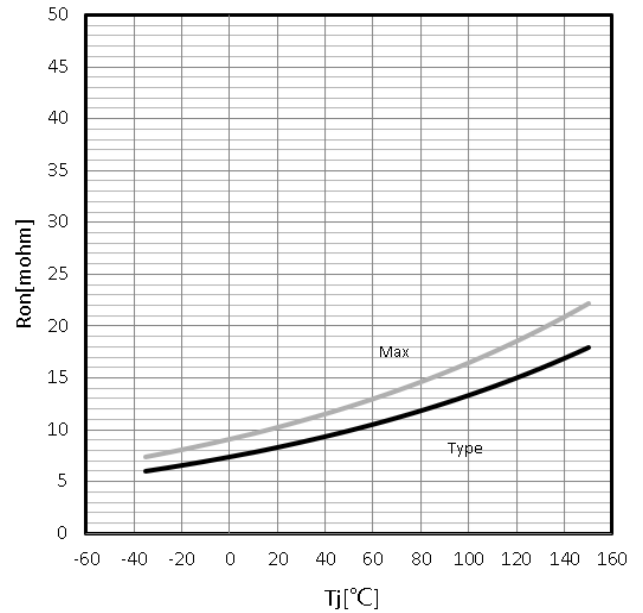




Gate Threshold Voltage

$$V_{TH}=f(T_j); I_D=250\mu A$$

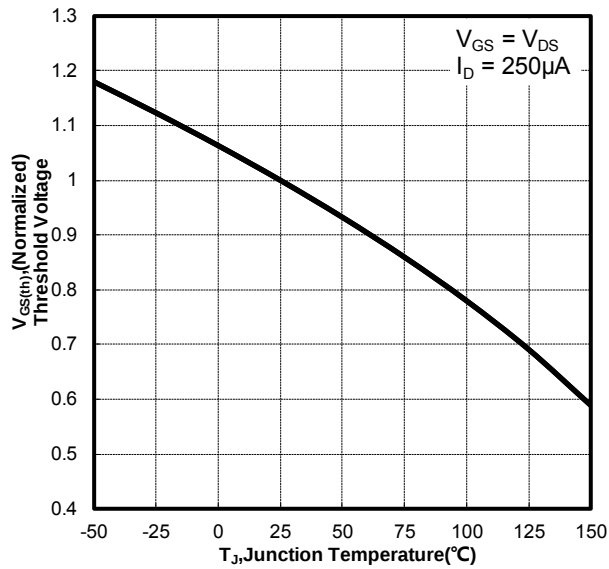


Drain-source breakdown voltage

$$V_{BR(DSS)}=f(T_j); I_D=250\mu A$$

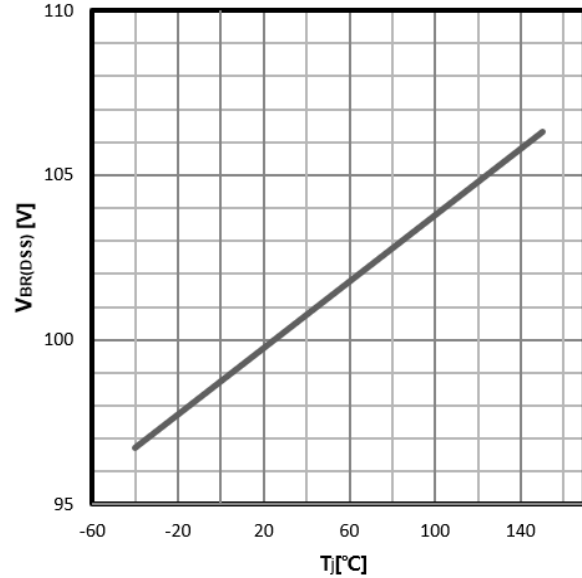


Typ. gate charge

$$V_{GS}=f(Q_g); I_D=10A$$

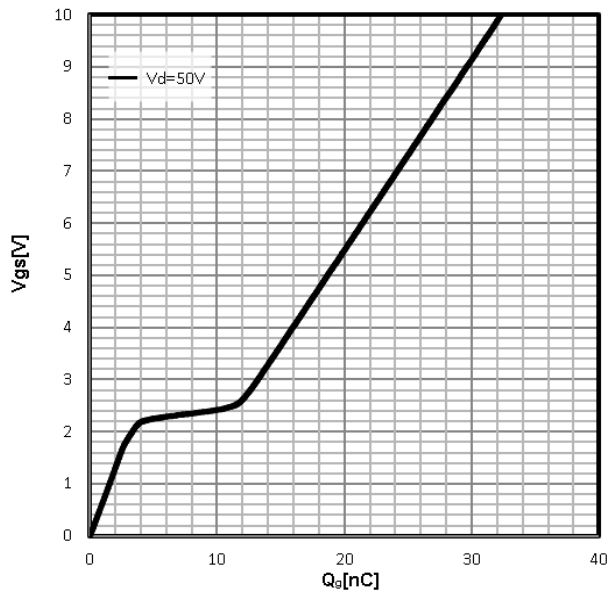


Typ. capacitances

$$C=f(V_{DS}); V_{GS}=0V; f=1MHz$$

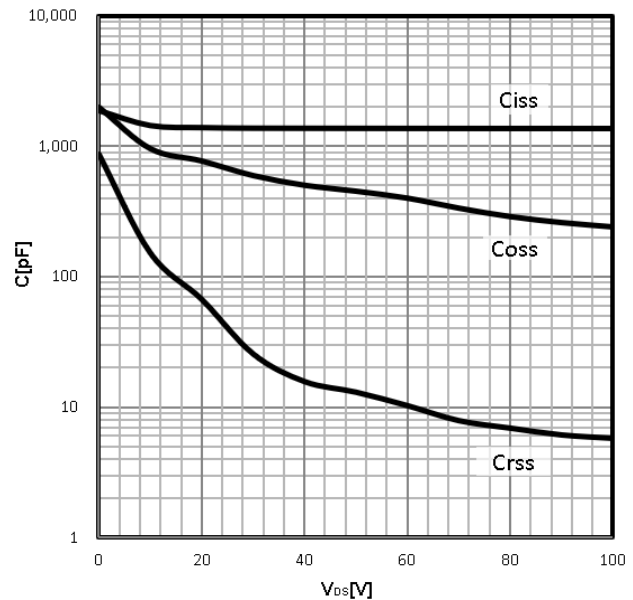





Power Dissipation
 $P_{tot}=f(T_C)$

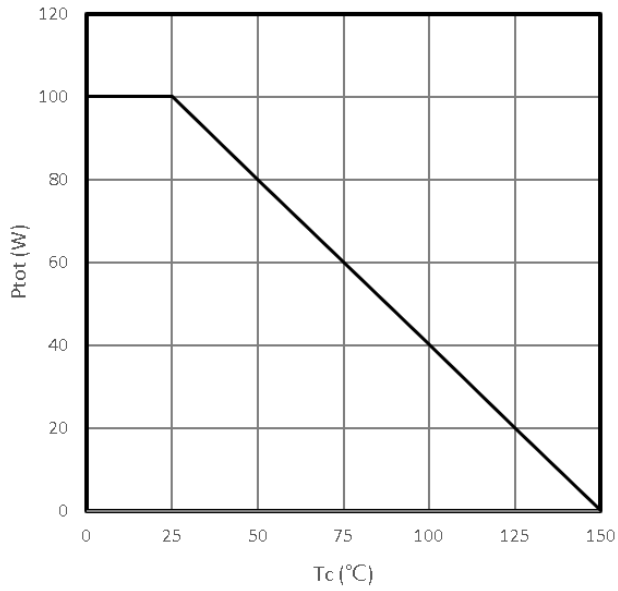


Maximum Drain Current
 $I_D=f(T_C)$

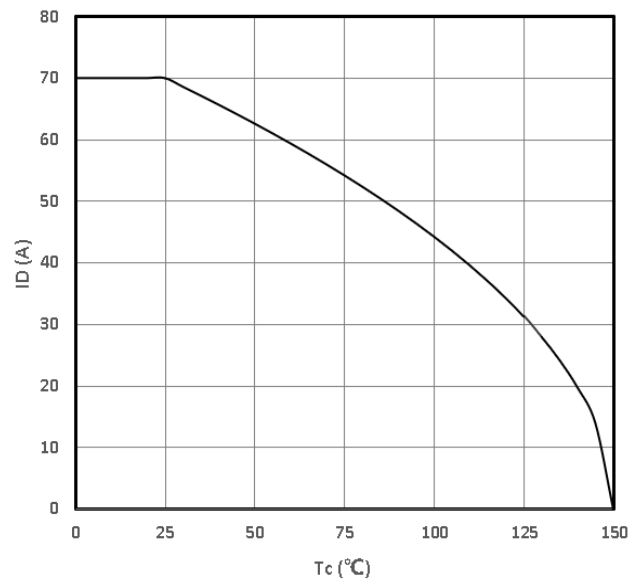

Safe operating area
 $I_D=f(V_{DS})$

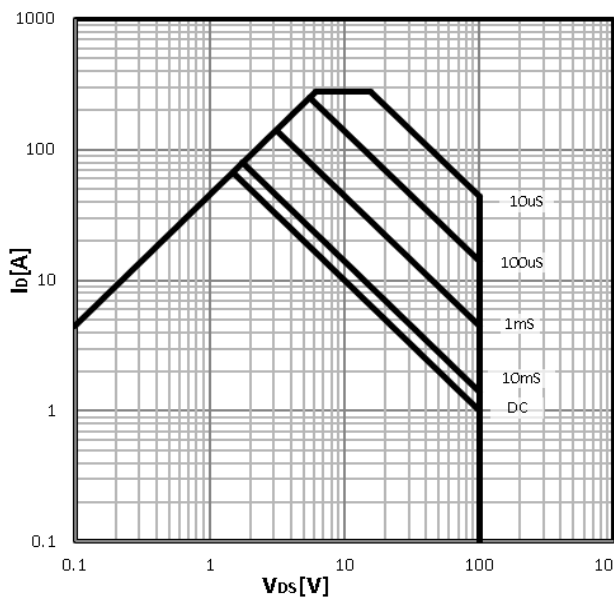


Body Diode Forward Voltage Variation
 $I_F=f(V_{GS})$

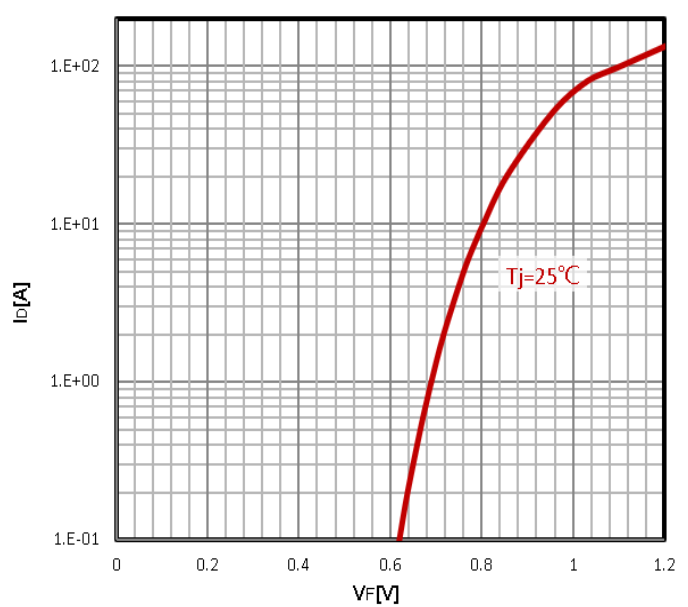




Max. transient thermal impedance

$$Z_{thJC}=f(t_p)$$

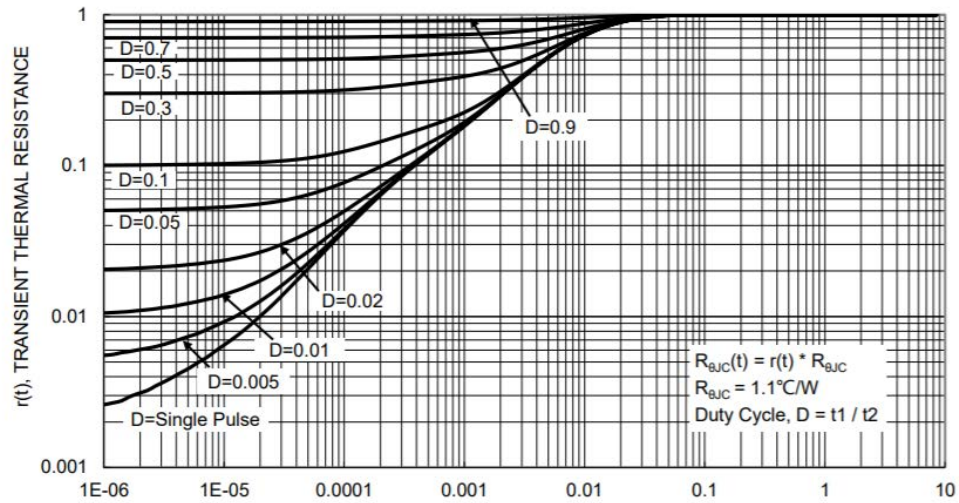



Package Information
TO-220C

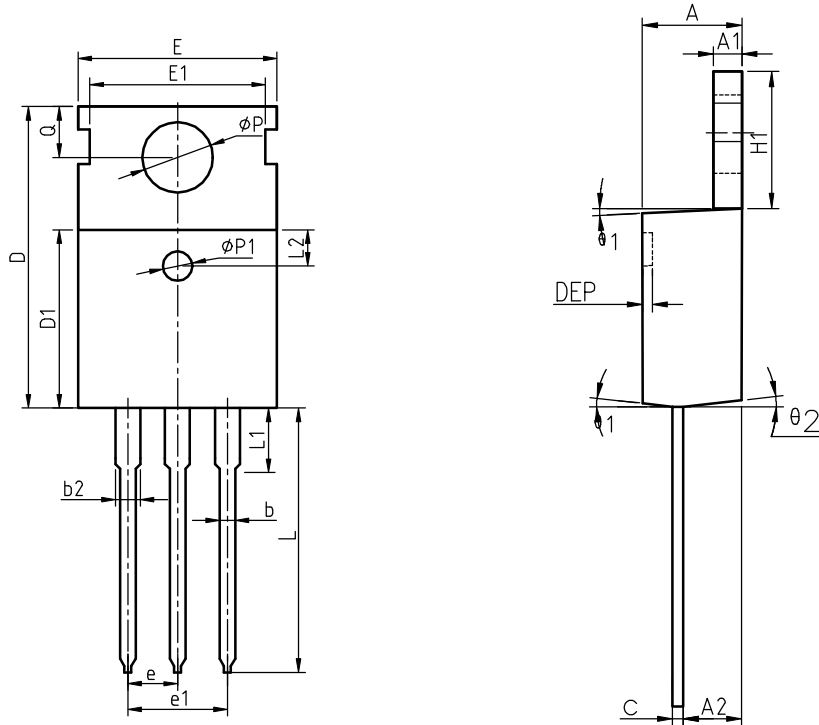

COMMON DIMENSIONS

SYMBOL	MIN	NOM	MAX	MIN	NOM	MAX
A	4.40	4.57	4.70	0.173	0.180	0.185
A1	1.27	1.30	1.33	0.050	0.051	0.052
A2	2.35	2.40	2.50	0.093	0.094	0.098
b	0.77	0.80	0.90	0.030	0.031	0.035
b2	1.17	1.27	1.36	0.046	0.050	0.054
c	0.48	0.50	0.56	0.019	0.020	0.022
D	15.40	15.60	15.80	0.606	0.614	0.622
D1	9.00	9.10	9.20	0.354	0.358	0.362
DEP	0.05	0.10	0.20	0.002	0.004	0.008
E	9.80	10.00	10.20	0.386	0.394	0.402
E1	-	8.70	-	-	0.343	-
E2	9.80	10.00	10.20	0.386	0.394	0.402
e		2.54	BSC		0.100	BSC
e1		5.08	BSC		0.200	BSC
H1	6.40	6.50	6.60	0.252	0.256	0.260
L	12.75	13.50	13.65	0.502	0.531	0.537
L1	-	3.10	3.30	-	0.122	0.130
L2		2.50	REF		0.098	REF
P	3.50	3.60	3.63	0.138	0.142	0.143
P1	3.50	3.60	3.63	0.138	0.142	0.143
Q	2.73	2.80	2.87	0.107	0.110	0.113
$\theta 1$	5°	7°	9°	5°	7°	9°
$\theta 2$	1°	3°	5°	1°	3°	5°
$\theta 3$	1°	3°	5°	1°	3°	5°



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.