




Discription

XBP1008-G is an ultra-low capacitance Transient voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for high-speed data interfaces. With typical capacitance of 1.5pF (IO to I/O) only, XBP1008-G is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2(ESD), Level 4(+15kV air, +8kV contact discharge), IEC 61000-4-4(electrical fast transient- EFT) (40A, 5/50ns), very fast charged device model(CDM)ESD and cable discharge event (CDE), etc.

XBP1008-G uses small SOT-23 package. Each XBP1008-G device can protect two high-speed data lines. The combined features of low capacitance, small size and high ESD robustness make XBP1008-G ideal for high-speed data port and high-frequency line applications. The low clamping voltage of the XBP1008-G guarantees a minimum stress on the protected IC.



SOT-23



Circuit Diagram

Features

- ★ Transient protection for high-speed data lines
IEC 61000-4-2(ESD) ±15kV (Contact)
±8kV (Air)
IEC 61000-4-4(EFT) 40A (5/50 ns)
Cable Discharge Event (CDE)
- ★ Protects two data lines
- ★ Low capacitance: 1.5pF Typical (I/O-I/O)
- ★ Low clamping voltage
- ★ Low leakage current

Applications

- ★ Serial ATA
- ★ Desktops, Servers and Notebooks
- ★ PCI Express
- ★ MDDI Ports
- ★ USB Data Line Protection
- ★ Digital Visual Interfaces



Ordering Information

Product ID	Pack	Qty(PCS)
XBP1008-G	SOT-23	3000


Absolute Ratings(Tamb = 25°C)

Symbol	Parameter	Value	Units
P _{PP}	Peak Pulse Power (t _p = 8/20 μ s)	28	W
T _{stg}	Storage Temperature Range	-55 to +155	°C
	IEC61000-4-2 (ESD) air discharge contact discharge	±15 ±8	KV


Electrical Characteristics

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V _{RWM}	Reverse Working Voltage	Any I/O pin to GND			5.0	V
V _{BR}	Reverse Breakdown Voltage	I _T = 1mA Any I/O pin to GND	5.6		9.4	V
I _R	Reverse Leakage Current	V _{RWM} = 5.0V Any I/O pin to GND			1.0	μA
V _C	Clamping Voltage	I _{PP} = 1A, t _p = 8/20μs Any I/O pin to GND			10.5	V
		I _{PP} = 2A, t _p = 8/20μs Any I/O pin to GND			14	V
C _J	Junction Capacitance	V _R = 0V, f = 1MHz Any I/O pin to GND		3.0	4.0	pF
C _J	Junction Capacitance	V _R = 0V, f = 1MHz Any I/O pin to I/O		1.5	2.5	pF

Typical Characteristics

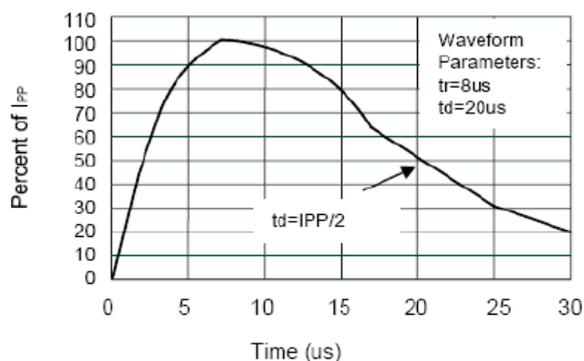


Pulse Waveform

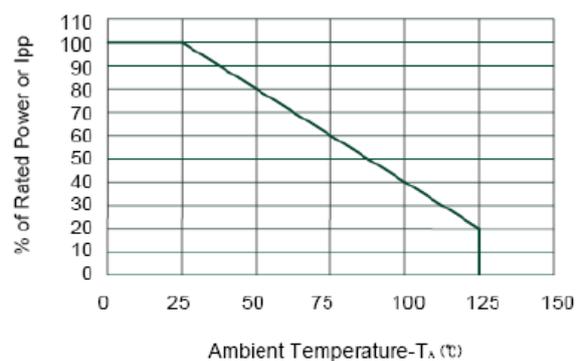

Power Derating Curve




SOT-23 Package Outline Dimensions

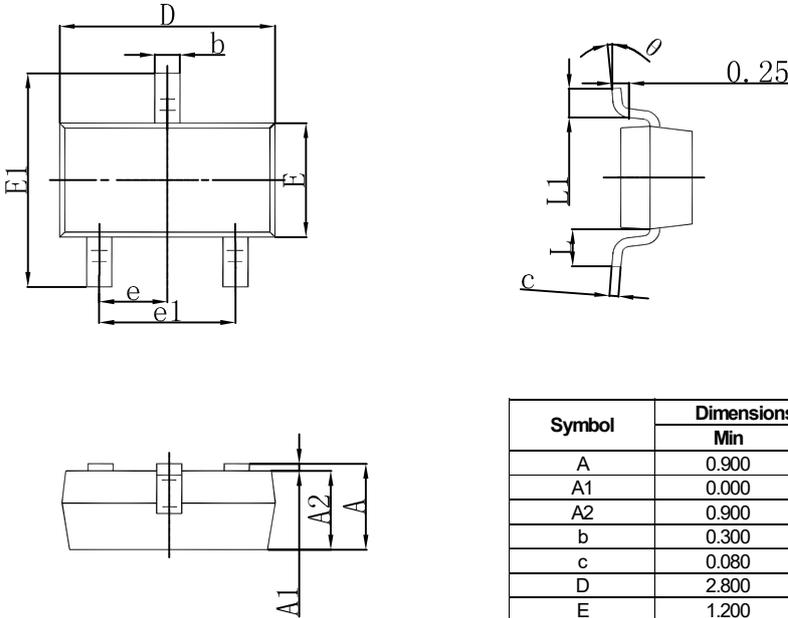

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
theta	0°	8°	0°	8°

SOT-23 Suggested Pad Layout



- Note:
1. Controlling dimension: in millimeters.
 2. General tolerance: $\pm 0.05\text{mm}$.
 3. The pad layout is for reference purposes only.



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.