




Description

HEL1018(TA)-VG photocoupler consist of an infrared light-emitting diode and a phototransistor. The devices can realize electrical isolation and signal transmission between different circuits, the products are widely used in power supply equipment, such as mobile phone charger, home appliance product power supply device, etc.


Features

- Current transfer ratio (CTR: 130% -260% @ $I_F=5\text{mA}$, $V_{CE}=5\text{V}$)
- High isolation voltage between input and output($V_{iso}=5,000\text{Vrms}$)
- Creepage distance > 8mm
- Operating temperature up to +110°C
- Collector-Emitter voltage $BV_{CEO} \geq 80\text{V}$
- The products comply with RoHS, REACH and HF;

Pin Configuration



Schematic

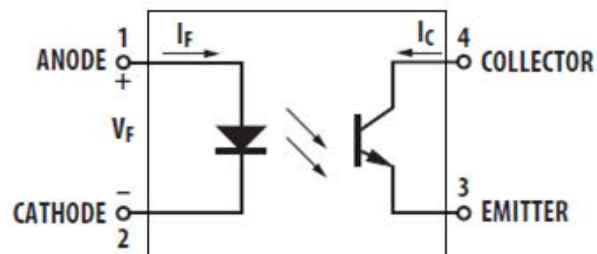

1. Anode
2. Cathode
3. Emitter
4. Collector



Electrical Characteristics

Absolute Maximum Ratings (Temperature=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I_F	50	mA
	Reverse Voltage	V_R	6	V
	Power Dissipation	P_D	90	mW
Output	Collector Emitter voltage	V_{CEO}	80	V
	Emitter Collector voltage	V_{ECO}	6	
	Collector current	I_C	50	mA
	Power Dissipation	P_C	180	mW
Total Power Dissipation		P_{tot}	270	mW
*1 Isolation Voltage		V_{iso}	5,000	Vrms
Operating Temperature		T_{opr}	-0 to + 70	°C
Storage Temperature		T_{stg}	-55 to + 125	
*2 Soldering Temperature		T_{sol}	260	

Note:

*1.AC For 1 Minute, R.H. = 40 ~ 60%;

Isolation voltage shall be measured using the following method:

- (1)Short between anode and cathode on the primary side and between collector and emitter on the secondary side;
- (2)The isolation voltage tester with zero-cross circuit shall be used;
- (3)The waveform of applied voltage shall be a sine wave.

*2. Soldering time is 10 seconds



Electrical Characteristics (Temperature=25°C)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V_F	$I_F=50\text{mA}$	---	1.35	1.6	V
	Reverse Current	I_R	$V_R=4\text{V}$	---	---	10	μA
	Terminal Capacitance	C_t	$V=0, f=1\text{MHz}$	---	30	250	pF
Output	Collector dark current	I_{CEO}	$V_{CE}=20\text{V}, I_F=0$	---	---	100	nA
	Collector-Emitter breakdown voltage	BV_{CEO}	$I_C=0.1\text{mA}$ $I_F=0$	80	---	---	V
	Emitter-Collector breakdown voltage	BV_{ECO}	$I_E=0.1\text{mA}$ $I_F=0$	6	---	---	V
Transfer characteristic	Collector Current	I_C	$I_F=5\text{mA}$ $V_{CE}=5\text{V}$	2.5	---	30	mA
	*1 Current Transfer Ratio	CTR		50	---	600	%
	Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_F=20\text{mA}$ $I_C=1\text{mA}$	---	0.1	0.2	V
	Isolation resistance	R_{iso}	DC500V 40~60%R.H.	5×10^{10}	---	---	Ω
	Floating Capacitance	C_f	$V=0, f=1\text{MHz}$	---	0.6	1	pF
	Cut-off Frequency	f_c	$V_{CE}=5\text{V}, I_C=2\text{mA}$ $R_L=100\Omega, -3\text{dB}$	---	80	---	kHz
	Rise time	t_r	$V_{CE}=2\text{V},$ $I_C=2\text{mA}$	---	4	18	μs
	Fall time	t_f	$R_L=100\Omega$	---	3	18	μs

Note:

*1 Current Transfer Ratio = $I_C / I_F \times 100\%$, Tolerance: $\pm 3\%$.

Rank Table of Current Transfer Ratio(Temperature=25°C)

CTR Rank	Min (%)	Max (%)	Condition
EL1018(TA)-VG	130	260	$I_F=5\text{mA}, V_{CE}=5\text{V}$



Characteristics Curves

Figure1. Forward Current vs. Forward Voltage

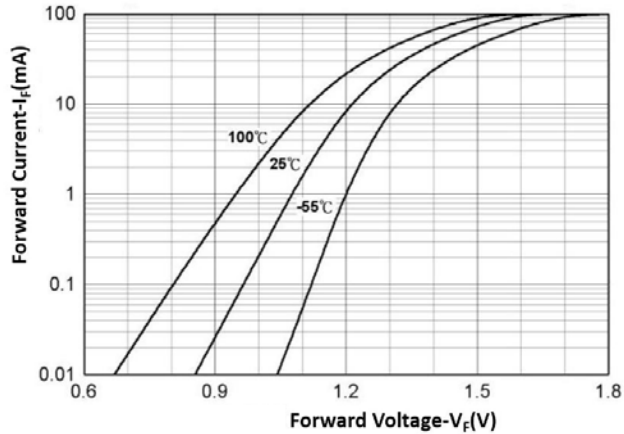


Figure2. Collector Dark Current vs. Ambient Temperature

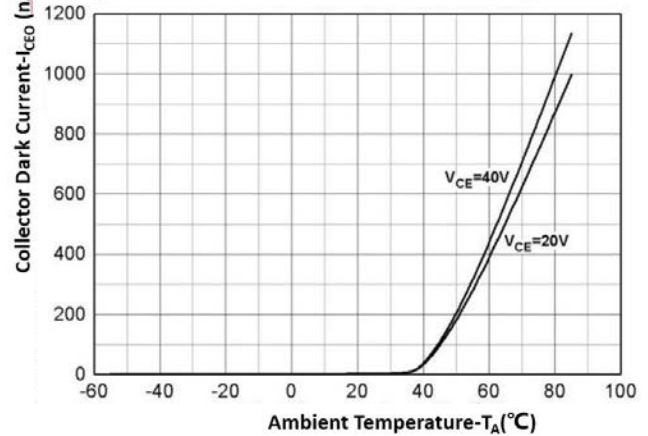


Figure3. Collector Current vs. Collector Emitter Voltage

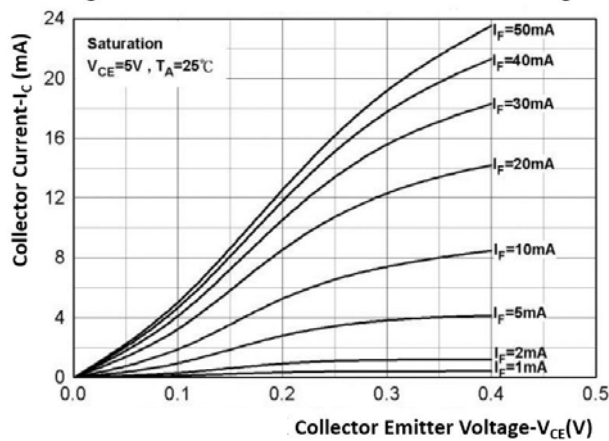


Figure4. Collector Current vs. Collector Emitter Voltage

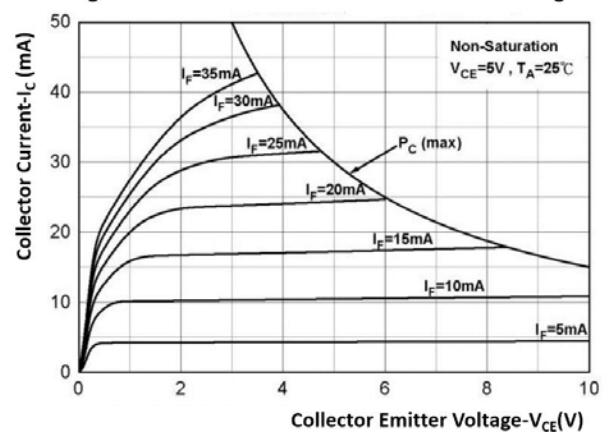


Figure5. Normalized Collector Current vs. Forward Current

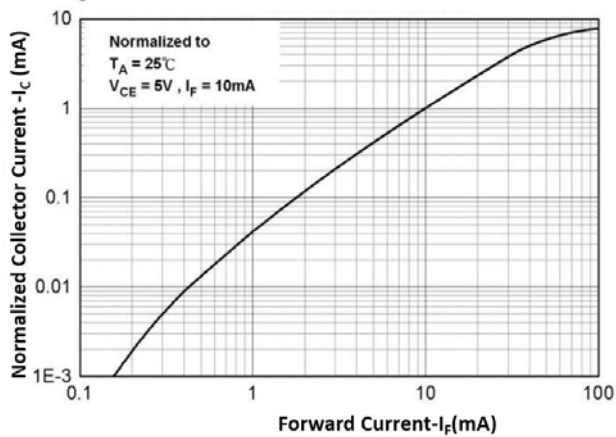


Figure6. Normalized Current Transfer Ratio vs. Forward Current

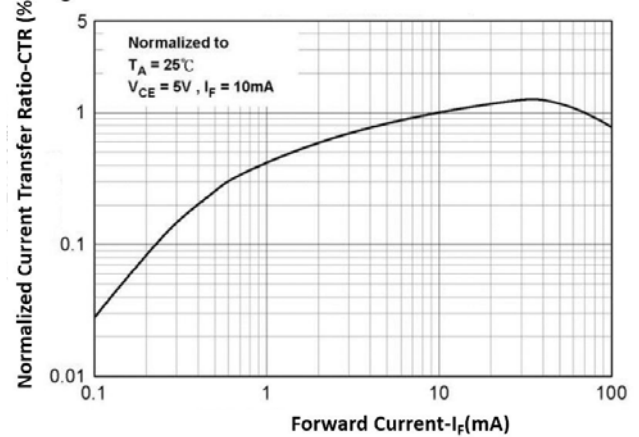




Figure7. Normalized Current Transfer Ratio vs. Ambient Temperature

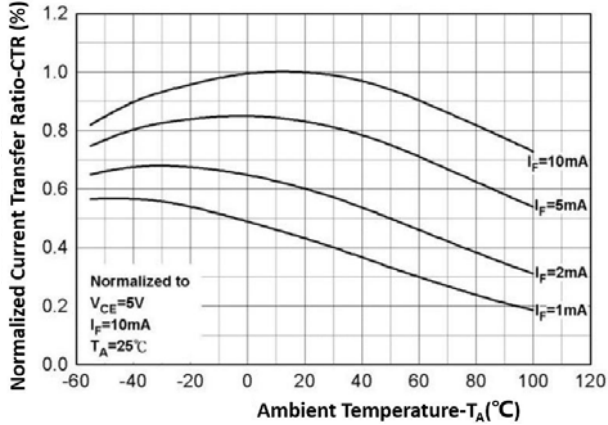


Figure8. Normalized Current Transfer Ratio vs. Ambient Temperature

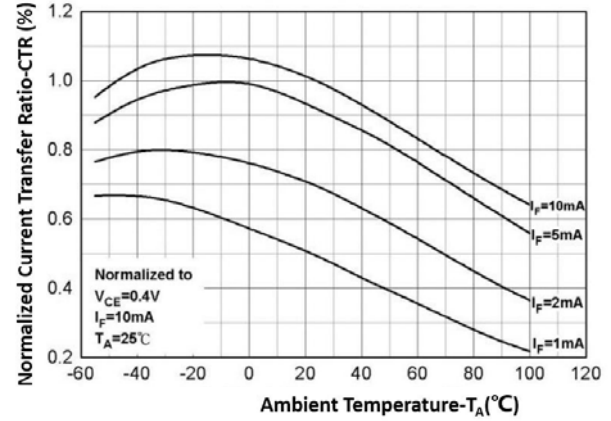


Figure9. Turn on/off Time vs. Collector Current

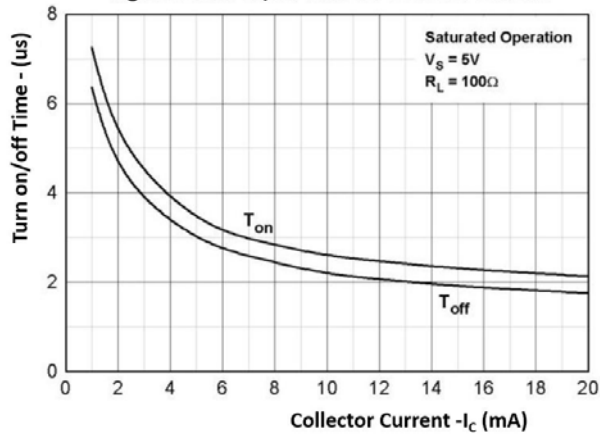


Figure10. Turn on/off Time vs. Forward Current


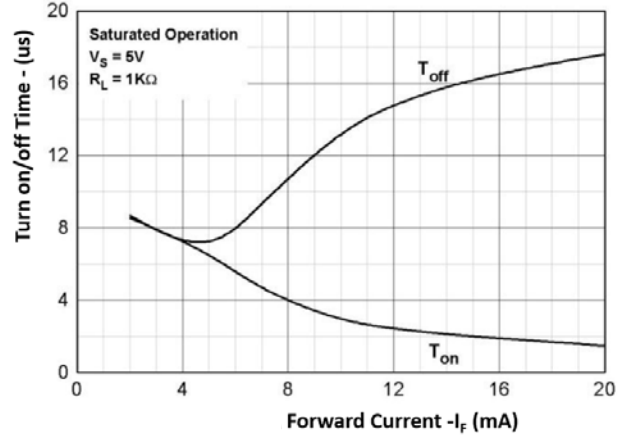


Figure11. Switching Time Test Circuit & Waveforms



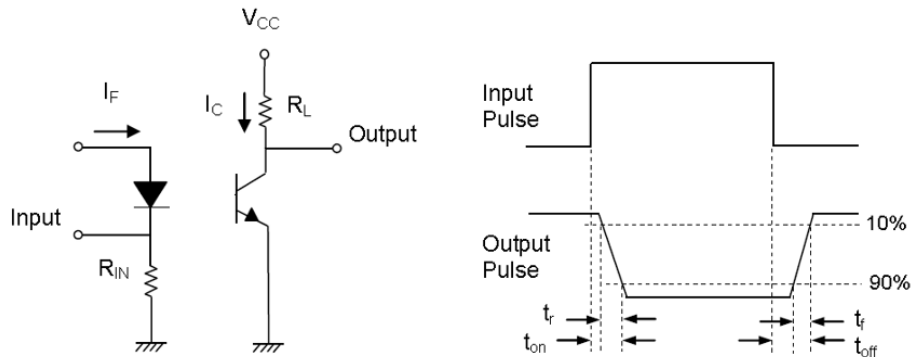

Reliability Test Items And Conditions


Test Items	Reference	Test Conditions	Time	Quantity	Criterion
Solderability	JESD22-B102	Tsol=(245±)5°C, t=5s;	1 times	22	0/22
Resistance to Soldering Heat	JESD22-A106	Tsol=(260±5)°C, t=10s	3 times	22	0/22
ESD-HBM	JESD22-A114	Ta=25°C, HBM (2000V)	P&N 3 times	10	0/10
High Temperature Storage	JESD22-A103	Ta=125°C	1000h	22	0/22
Low Temperature Storage	JESD22-A119	Ta= -55°C	1000h	22	0/22
Thermal Shock	JESD22-A104	-55°C(15min)←→125°C(15min)	300 cycles	22	0/22
Lifespan Test	JESD22-A108	Ta=25°C, I _F =50mA, V _{CC} =5V	1000h	22	0/22
DC Operating Life	JESD22-A108	Ta=110°C, I _F =20mA, V _{CC} =5V	1000h	76	0/76
High Temperature High Humidity bias Voltage	JESD22-A101	Ta =85°C, RH=85% I _F =0mA, V _{CE} =64V	1000h	22	0/22
High Temperature bias Voltage	JESD22-A108	Ta =110°C, I _F =0mA, V _{CE} =80V	1000h	22	0/22
High pressure steam test	JESD22-A102	P=15PSIG, 121°C, 100%RH	96h	22	0/22

Criteria For Judging Damage

Test Items	Symbol	Test Conditions	Criteria For Judging Damage
Forward Voltage	V _F (V)	I _F =20mA	Initial Data±20%
Reverse Current	I _R (uA)	V _R =4V	I _R ≤10μA
Current Transfer Ratio	CTR(%)	I _F =5mA, V _{CE} =5V	Initial Data±20%
Collector-Emitter Saturation Voltage	V _{CE} (sat)	I _F =20mA, I _C =1mA	V _{CE} (sat) ≤0.2V
Collector-Emitter breakdown voltage	BV _{CEO} (V)	I _C =0.1mA, I _F =0mA	BV _{CEO} ≥80V& Initial Data±20%
Collector Current	I _{CEO} (nA)	V _{CE} =20V, I _F =0	I _{CEO} ≤0.1μA




Packaging Dimension (Unit : mm)

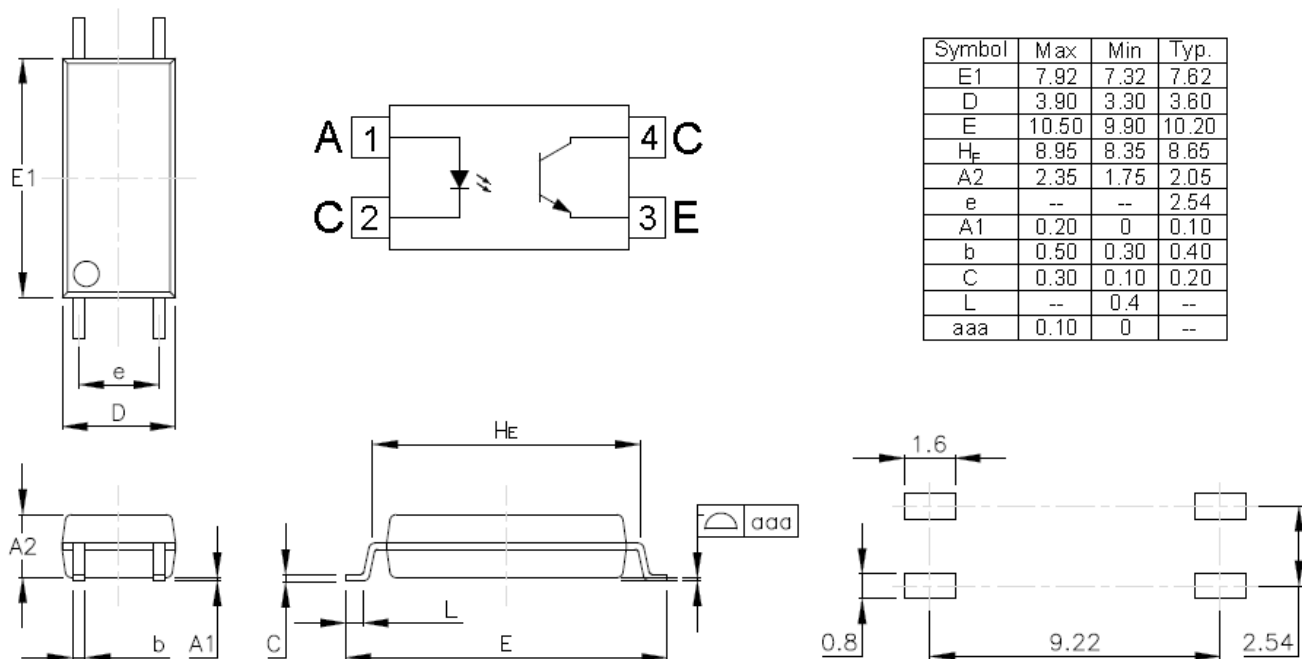




Packaging

Standard Packing : 3000pcs/Reel

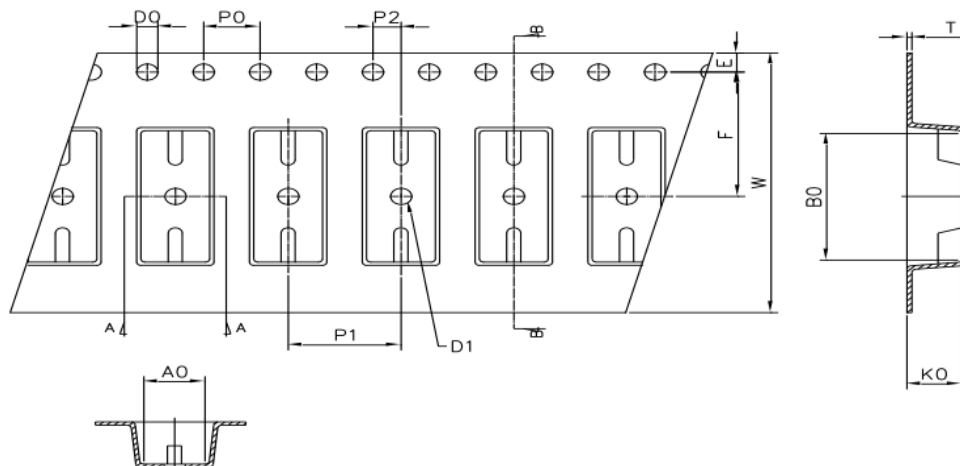

Dimension No.	Ao	Bo	Do	D1	Po	P1	P2	E	F	T	W	Ko
	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.00	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05	+0.30 -0.10	+0.10 -0.10
Dimension (mm)	5.10	10.50	1.50	1.50	4.00	8.00	2.00	1.75	7.50	0.40	16.00	4.20

Moisture Proof and Anti-Electrostatic Foil Bag

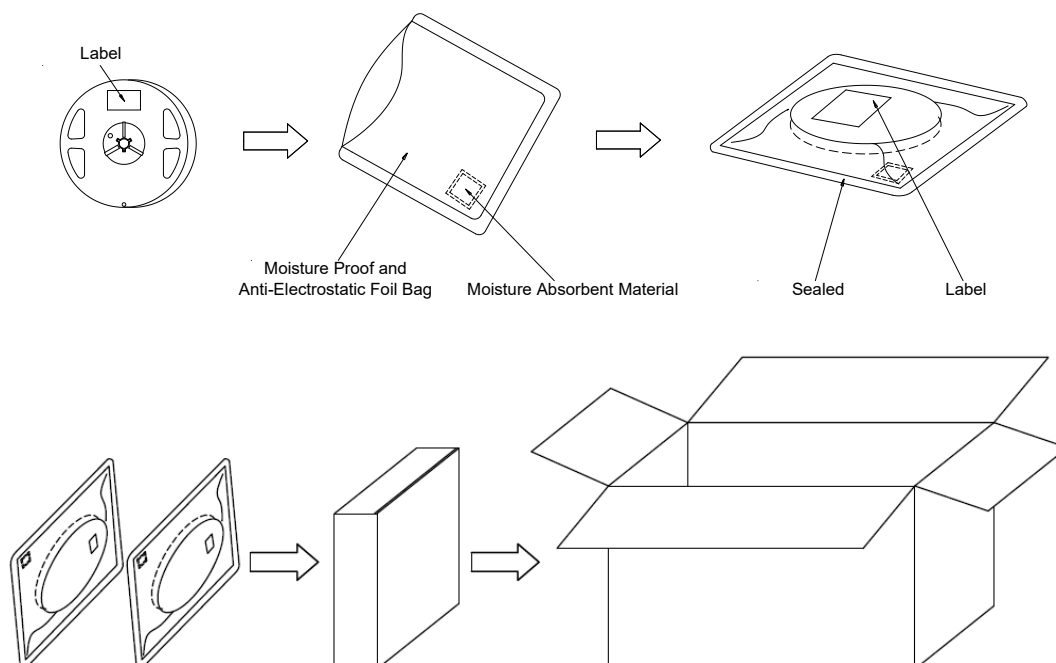

Each inner box contains 2 packing bag, 6000pcs product per box;
Each outer box contains 10 inner boxes, 60000pcs product per box;



Precautions for Use

Hand soldering Condition

Hand soldering by soldering iron, One time soldering is recommended:


Temperature: 380

+5/-5°C Time: 3 sec max

Reflow Soldering

Stress on the product should be avoided during heating in soldering process.

After soldering, do not deal with the product before its temperature drop down to room temperature.

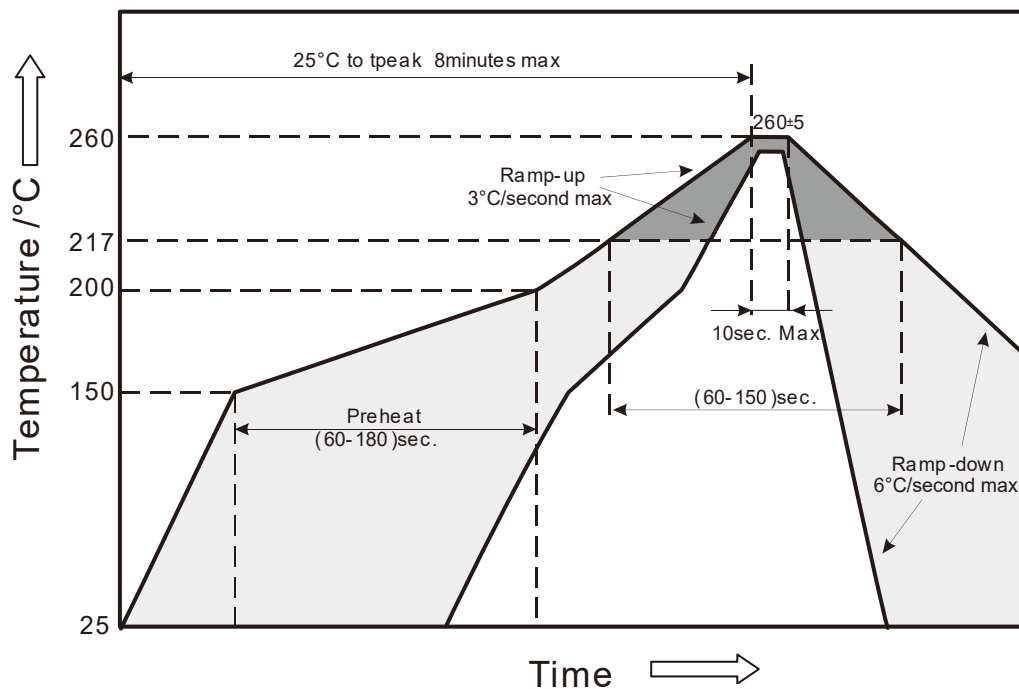



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.