



General Description

AMS1117-xx is a series of low dropout three-terminal regulators with a dropout of 1.1 V at 1A load current. AMS1117-xx features a very low standby current 2mA compared to 5mA of competitor.

Other than a fixed version, $V_{out} = 1.2V, 1.5V, 1.8V, 2.5V, 2.85V, 3.3V$, and 5V, AMS1117-xx has an adjustable version, which can provide an output voltage from 1.25 to 12V with only two external resistors.

AMS1117-xx offers thermal shut down function, to assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within 2%. Other output voltage accuracy can be customized on demand, such as 1%.

AMS1117-xx is available in SOT-223 package.

Features

- Output current is 1A
- Range of operation input voltage: 15V
- Line regulation: 0.03%/V (typ.)
- Standby current: 2mA (typ.)
- Load regulation: 0.2%/A (typ.)
- Environment Temperature: $-40^{\circ}C \sim 125^{\circ}C$

Application

- Power Management for Computer Mother Board, Graphic Card
- LCD Monitor and LCD TV
- DVD Decode Board
- ADSL Modem
- Post Regulators for Switching Supplies

Order Information

Orderable Device	Package	Output Voltage	Packing Option
AMS1117-xx	SOT-223	1.2V, 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 5.0V, adj	2500/Reel

xx: From 1.2-5.0, ADJ

Pin Configuration And Descriptions




Table1: AMS1117-xx series (SOT-223 PKG)

PIN NO.	PIN NAME	FUNCTION
1	VSS/ADJ	VSS/ADJ pin
2	VOU	Output voltage pin
3	VIN	Input voltage pin
4	VOU	Output voltage pin




Absolute Maximum Ratings

Description	Symbol	Value Range	Unit
MAX Input Voltage	V_{IN}	18	V
Max Operating Junction Temperature	T_j	150	°C
Storage Temperature	T_s	-55~+150	°C
Lead Temperature & Time(10S)		260	°C

Note:Stresses greater than those listed under “Absolute Maximum Ratingsmay” cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditionsis” not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

Block Diagram

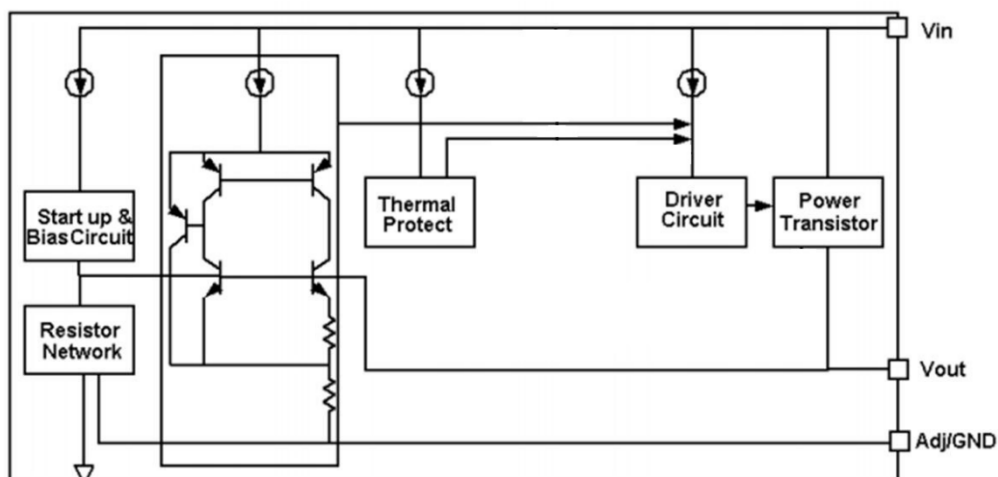



DC Characteristics (unless otherwise noted $T_A = 25^\circ\text{C}$)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{in}	Input voltage		--	15	18	V
V_{ref}	Reference voltage	AMS1117-ADJ $10\text{mA} \leq I_{out} \leq 1\text{A}$, $V_{in} = 2.55\text{V}$	1.225	1.25	1.275	V
V_{out}	Output voltage	AMS1117-1.2 $0 \leq I_{out} \leq 1\text{A}$, $V_{in} = 2.5\text{V}$	1.176	1.2	1.224	V
		AMS1117-1.5 $0 \leq I_{out} \leq 1\text{A}$, $V_{in} = 2.8\text{V}$	1.47	1.5	1.53	V
		AMS1117-1.8 $0 \leq I_{out} \leq 1\text{A}$, $V_{in} = 3.1\text{V}$	1.764	1.8	1.836	V
		AMS1117-2.5 $0 \leq I_{out} \leq 1\text{A}$, $V_{in} = 3.8\text{V}$	2.45	2.5	2.55	V
		AMS1117-2.85 $0 \leq I_{out} \leq 1\text{A}$, $V_{in} = 4.15\text{V}$	2.793	2.85	2.907	V
		AMS1117-3.3 $0 \leq I_{out} \leq 1\text{A}$, $V_{in} = 4.6\text{V}$	3.234	3.3	3.366	V
		AMS1117-5.0 $0 \leq I_{out} \leq 1\text{A}$, $V_{in} = 6.3\text{V}$	4.9	5	5.1	V
ΔV_{out}	Line regulation	AMS1117-1.2 $I_{out} = 10\text{mA}$, $2.5\text{V} \leq V_{in} \leq 10\text{V}$		4	19	mV
		AMS1117-1.5 $I_{out} = 10\text{mA}$, $2.8\text{V} \leq V_{in} \leq 10\text{V}$		5	26	mV
		AMS1117-ADJ $I_{out} = 10\text{mA}$, $2.55\text{V} \leq V_{in} \leq 12\text{V}$		5	24	mV
		AMS1117-1.8 $I_{out} = 10\text{mA}$, $3.1\text{V} \leq V_{in} \leq 12\text{V}$		5	32	mV
		AMS1117-2.5 $I_{out} = 10\text{mA}$, $3.8\text{V} \leq V_{in} \leq 12\text{V}$		8	41	mV
		AMS1117-2.85 $I_{out} = 10\text{mA}$, $4.15\text{V} \leq V_{in} \leq 12\text{V}$		8	46	mV
		AMS1117-3.3 $I_{out} = 10\text{mA}$, $4.6\text{V} \leq V_{in} \leq 12\text{V}$		9	49	mV
		AMS1117-5.0 $I_{out} = 10\text{mA}$, $6.3\text{V} \leq V_{in} \leq 12\text{V}$		10	56	mV



ΔV_{out}	Load regulation	AMS1117-1.2 $V_{in}=2.5V, 10mA \leq I_{out} \leq 1A$		10	40	mV
		AMS1117-1.5 $V_{in}=2.8V, 10mA \leq I_{out} \leq 1A$		10	40	mV
		AMS1117-ADJ $V_{in}=2.55V, 10mA \leq I_{out} \leq 1A$		10	40	mV
		AMS1117-1.8 $V_{in}=3.1V, 10mA \leq I_{out} \leq 1A$		10	40	mV
		AMS1117-2.5 $V_{in}=2.8V, 10mA \leq I_{out} \leq 1A$		10	40	mV
		AMS1117-2.85 $V_{in}=4.15V, 10mA \leq I_{out} \leq 1A$		10	40	mV
		AMS1117-3.3 $V_{in}=4.6V, 10mA \leq I_{out} \leq 1A$		10	40	mV
		AMS1117-5.0 $V_{in}=6.3V, 10mA \leq I_{out} \leq 1A$		10	40	mV
Vdrop	Dropout voltage	$I_{out}=100mA$		1.05	1.2	V
		$I_{out}=1A$		1.1	1.3	V
Imin	Minimum load current	AMS1117-ADJ		2	10	mA
Iq	Quiescent Current	AMS1117-1.2, $V_{in}=10V$		2	5	mA
		AMS1117-1.5, $V_{in}=10V$		2	5	mA
		AMS1117-1.8, $V_{in}=12V$		2	5	mA
		AMS1117-2.5, $V_{in}=12V$		2	5	mA
		AMS1117-2.85, $V_{in}=12V$		2	5	mA
		AMS1117-3.3, $V_{in}=12V$		2	5	mA
		AMS1117-5.0, $V_{in}=12V$		2	5	mA
Iadj	Adjust pin current	AMS1117-ADJ $V_{in}=5V, 10mA \leq I_{out} \leq 1A$		55	120	μA
Ichange	Iadj change	AMS1117-ADJ $V_{in}=5V, 10mA \leq I_{out} \leq 1A$		0.2	10	μA
ΔV_{out}	Temperature coefficient	$V_{in}=4.5V, I_{out}=10mA$ $V_{OUT}=3.3V$ $20^{\circ}C \leq T_a \leq 120^{\circ}C$		30		mV
θ_{JC}	Thermal resistance	SOT-223		20		$^{\circ}C/W$

Note1: All test are conducted under ambient temperature $25^{\circ}C$ and within a short period of time 20ms

Note2: Load current smaller than minimum load current of AMS1117-ADJ will lead to unstable or oscillation output.




Application Circuit

Basic Circuits

AMS1117-xx has an adjustable version and six fixed versions (1.2V, 1.5V, 1.8V, 2.5V, 2.85V, 3.3V and 5V)

Fixed Output Voltage Version

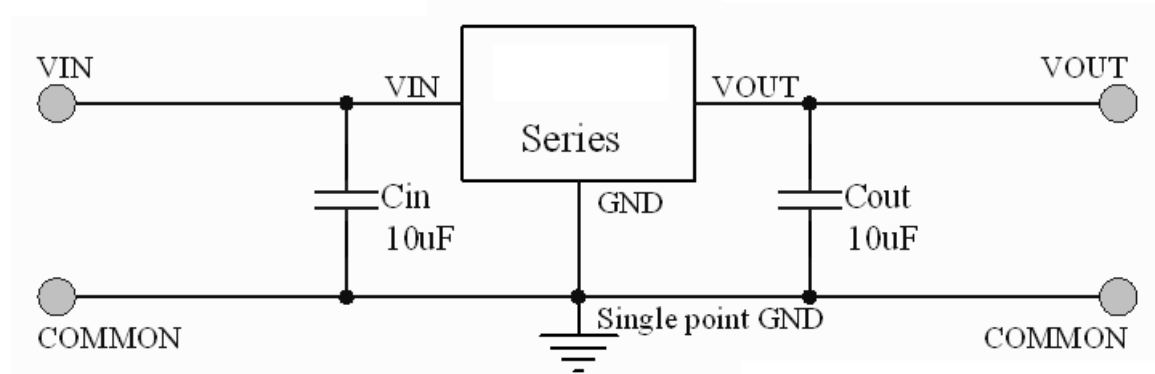

Application circuit of AMS1117-xx fixed version

- 1) Recommend using 10uF tan capacitor as bypass capacitor (C1) for all application circuit.
- 2) Recommend using 10uF tan capacitor to assure circuit stability.



Function Description

AMS1117-xx is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, power transistors and its driver circuit and so on.


The thermal shut down modules can assure chip and its application system working safety when the temperature is larger than 200°C.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100 ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique.


Typical Characteristics

T_A=25°C, unless otherwise noted


Output Voltage vs. Input Voltage (V_{OUT}=3.3V)

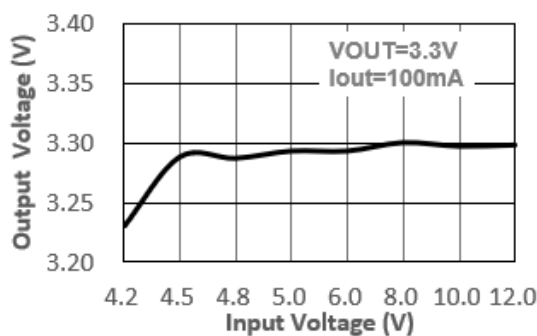


Output Voltage vs. Input Voltage (V_{OUT}=1.8V)

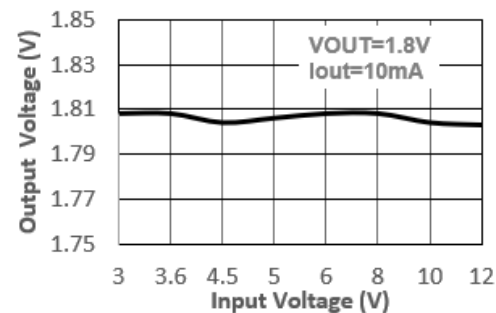


Output Voltage vs. Output Current (V_{OUT}=3.3V)

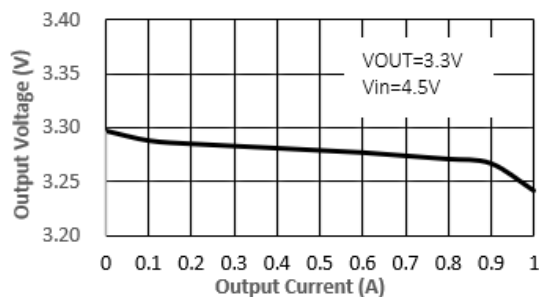


Output Voltage vs. Output Current (V_{OUT}=1.8V)

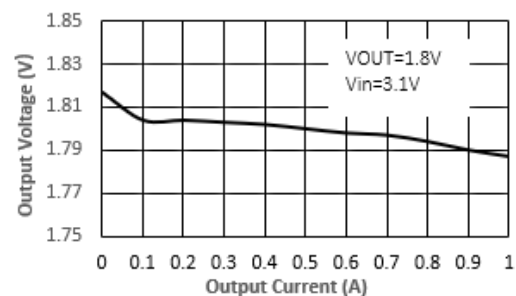

Line Regulation vs. Junction Temperature

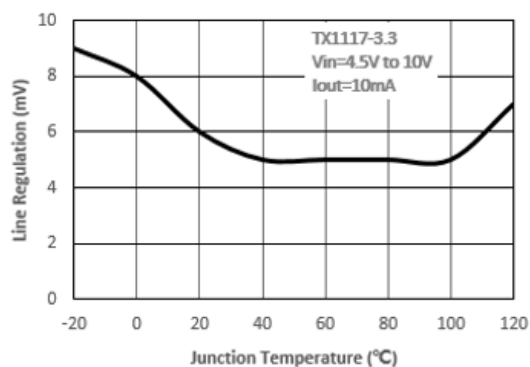


Load Regulation vs. Junction Temperature

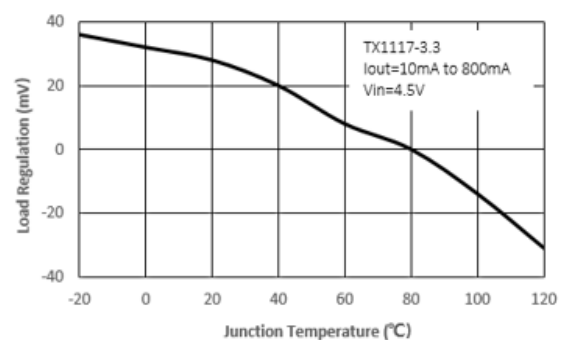





Reference Voltage vs. Junction Temperature

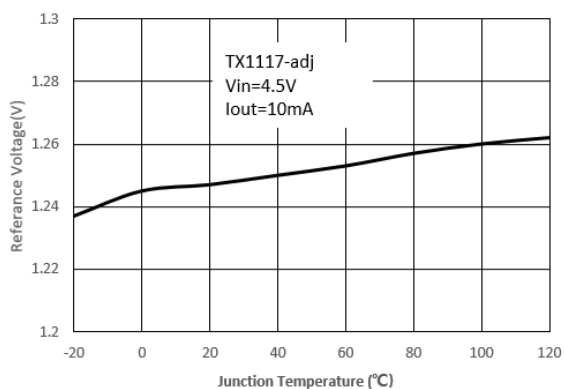


Output Voltage vs. Junction Temperature

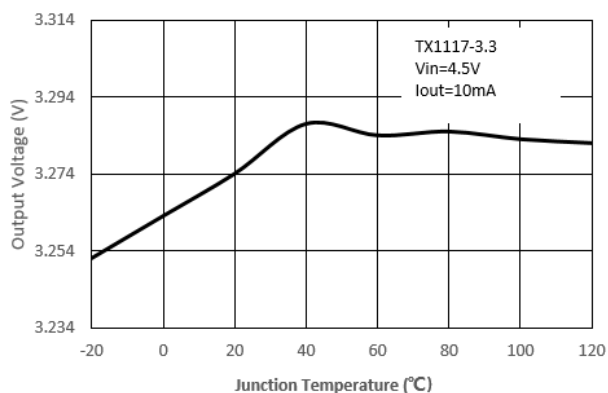


Minimum Load Current vs. Junction Temperature

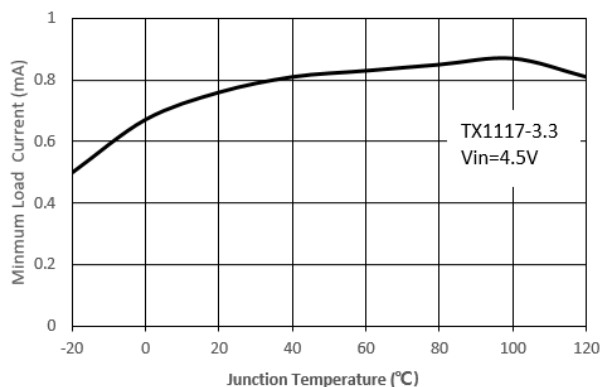


Adjust Pin Current vs. Junction Temperature

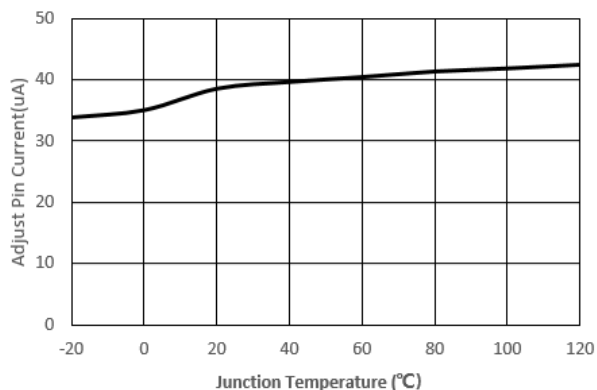

PSRR vs. Frequency



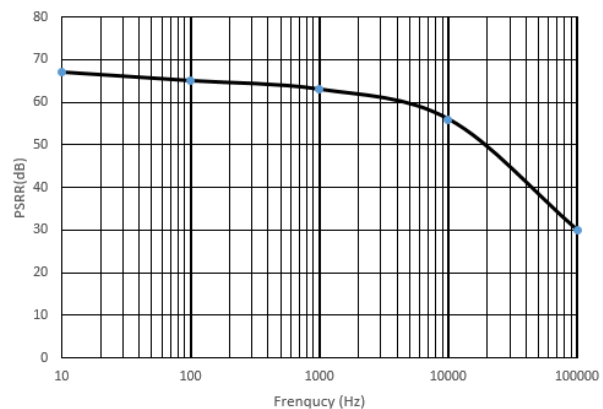


Dropout Voltage vs. Output Current

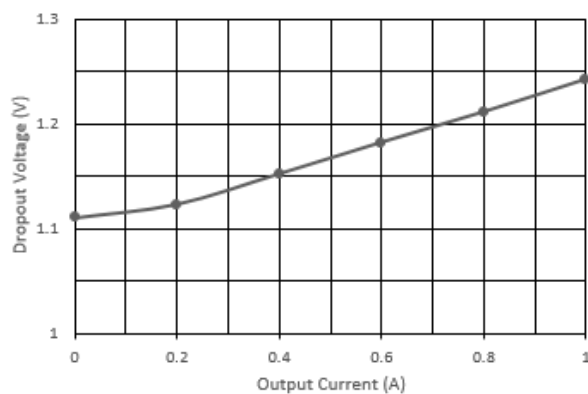



Package Outline Dimensions SOT-223

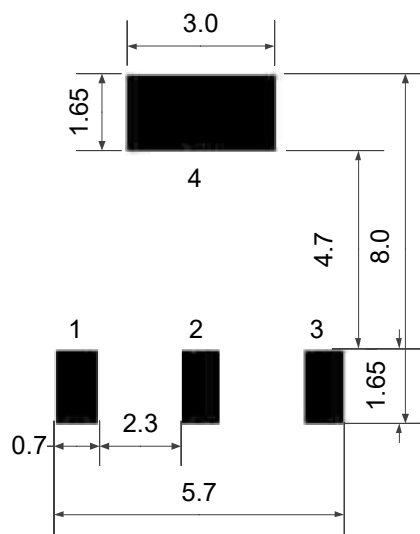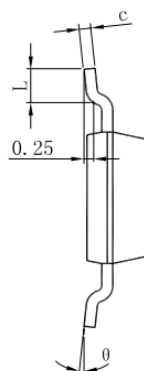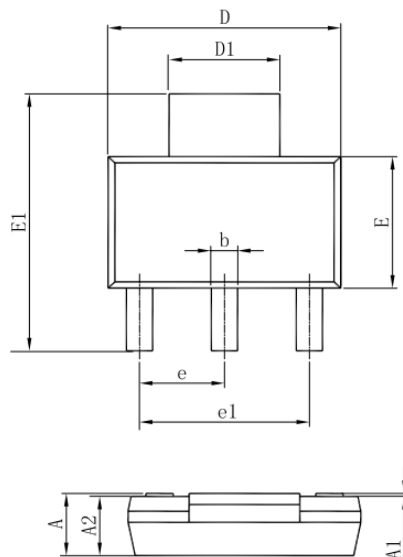

PCB Board

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.520	1.800	0.060	0.071
A1	0.000	0.100	0.000	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.820	0.026	0.032
c	0.250	0.350	0.010	0.014
D	6.400	6.600	0.252	0.260
D1	2.900	3.100	0.114	0.122
E	3.300	3.700	0.130	0.146
E1	6.830	7.070	0.269	0.278
e	2.300(BSC)		0.091(BSC)	
e1	4.500	4.700	0.177	0.185
L	0.900	1.150	0.035	0.045
θ	0°	10°	0°	10°



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.